

ORION

MANUAL BANDSAW H27

ORION.....	€ 8.800
ORION+VHZ.....	€ 9.000
Packaging.....	€ 70
Box/cage.....	€ 350

STANDARD LINE VOLTAGE
400V/50Hz/3Ph
AVAILABLE LINE VOLTAGES
230V/50Hz/3Ph
220V/60Hz/3Ph
440V/60Hz/3Ph
AVAILABLE WITH AN EXTRA COST OF € 300
110V/60Hz/1Ph
230V/50Hz/1Ph
220V/60Hz/1Ph



OPTIONAL	REF.	€
Pneumatic vice clamping	KIT PN	900
Cutting angle display	VAT	1.200
1-nozzle sprayer - Supplied with 5 kg of Nebula Oil	NB1 BOX	1.300
2-nozzle sprayer - Supplied with 5 kg of Nebula Oil	NB2 BOX	1.500
Laser lighting for cutting line	LX	1.000
Manual double vice - Cut at 0° (Removable)	DM	900
Blade tension reading cylinder with pressure gauge	MT	600
50 mm roller support assembly (max +40° - No measuring rod)	SR DS	250
Head descent in gravitational modality	KIT G	1.100
M42 bimetallic bandsaw blade	2700x27x0,9	35

EASY ROLLER TABLE 400 mm wide roller - Load 260 kg/m (h min 940 mm / h max 1030 mm)

2-leg roller table 1 m (1st Module)	RE2G	750
1-leg roller table 1 m (Next module)	RE1G	650


FRAME 550 mm wide roller - Load 750 kg (h min 840 mm / h max 1015 mm)	C2	630
---	----	-----

EASY ROLLER TABLE MACHINE CONNECTION

Loading side connection	CREC	250
Unloading side connection	CRES	350
Unloading side pull-out roller surface - Needs CRES	RRS	350

LENGTH STOPS WITH ARTICULATED STRIKER FOR EASY ROLLER TABLE


Length stop 1 m	FM1RSE	700
Length stop 2 m	FM2RSE	850
Length stop 3 m	FM3RSE	1.000
Length stop 4 m	FM4RSE	1.100
Length stop 5 m	FM5RSE	1.300
Length stop 6 m	FM6RSE	1.500

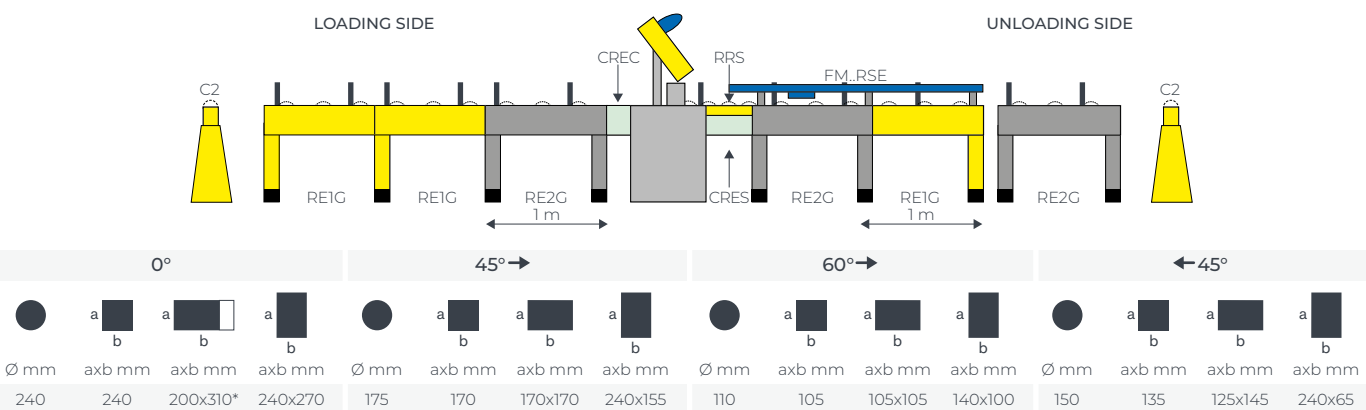

2700x27x0,9
mm



35÷70
m/min




1,3
kW

ORION




16÷120
m/min



1,1
kW

ORION+VHZ



0,08
kW



475
kg



0,85x1,45x1,5
m axbxc



990±10
mm