

SATURN+G

MANUAL BANDSAW H27

SATURN+G.....	€ 12.600
SATURN+G+VHZ.....	€ 12.900

Packaging.....	€ 120
Box/cage.....	€ 450

STANDARD LINE VOLTAGE
400V/50Hz/3Ph
AVAILABLE LINE VOLTAGES
230V/50Hz/3Ph
220V/60Hz/3Ph
440V/60Hz/3Ph
AVAILABLE WITH AN EXTRA COST OF € 300
230V/50Hz/1Ph
220V/60Hz/1Ph



OPTIONAL

	REF.	€
Pneumatic vice clamping	KIT PN	900
Cutting angle display	VAT	1.200
1-nozzle sprayer - Supplied with 5 kg of Nebula Oil	NB1 BOX	1.300
2-nozzle sprayer - Supplied with 5 kg of Nebula Oil	NB2 BOX	1.500
Laser lighting for cutting line	LX	1.000
Double vice manual - Cut at 0° (Not removable)	DM	2.000
Blade tension reading cylinder with pressure gauge	MT	600
50 mm roller support assembly (max +40° - No measuring rod)	SR DS	250
M42 bimetallic bandsaw blade	3420x27x0,9	43

ROLLER TABLE 400 mm wide roller - Load 300 kg/m (h min 910 mm / h max 1000 mm)

2-leg roller table 1 m (1st Module)	RP2G	1.150
1-leg roller table 1 m (Next module)	RP1G	900

FRAME 550 mm wide roller - Load 750 kg (h min 840 mm / h max 1015 mm)


C2	630
----	-----

ROLLER TABLE MACHINE CONNECTION

Loading side connection	CRC	220
Unloading side connection	CRS	300
Unloading side pull-out roller surface - Needs CRS	RRS	350

LENGTH STOPS WITH ARTICULATED STRIKER


Length stop 1 m	FM1RS	700
Length stop 2 m	FM2RS	850
Length stop 3 m	FM3RS	1.000
Length stop 4 m	FM4RS	1.150
Length stop 5 m	FM5RS	1.300
Length stop 6 m	FM6RS	1.450

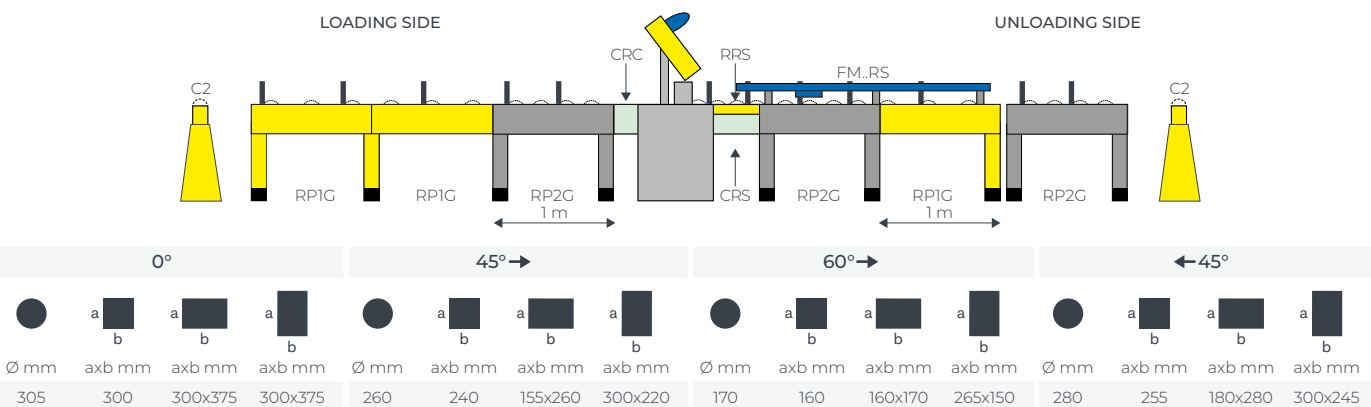

3420x27x0,9
mm



35÷70
m/min




1,3
kW

SATURN+G




16÷120
m/min



1,5
kW

SATURN+G+VHZ



0,08
kW



720
kg



1x1,8x1,55
m axbxc



990±10
mm