

SIRIUS.....€10.200
SIRIUS+VHZ.....€ 10.400

Packaging.....€ 70
Box/cage.....€ 350

STANDARD EQUIPMENTS

DTI Interrupted cutting device (With limit switch)

STANDARD LINE VOLTAGE

400V/50Hz/3Ph

AVAILABLE LINE VOLTAGES

230V/50Hz/3Ph

220V/60Hz/3Ph

440V/60Hz/3Ph

ONLY FOR VHZ VERSIONS, AVAILABLE WITH AN EXTRA COST OF € 300

230V/50Hz/1Ph

220V/60Hz/1Ph

**OPTIONAL**

	REF.	€
Blade rotation sensor	SENS	300
Oleodynamic device for bundle cutting - Cut at 0°	DOTM	900
Vice pressure control	RPM1	900
Cutting angle display	VAT	1.200
1-nozzle sprayer - Supplied with 5 kg of Nebula Oil	NB1 BOX	1.300
2-nozzle sprayer - Supplied with 5 kg of Nebula Oil	NB2 BOX	1.500
Laser lighting for cutting line	LX	1.000
Mechanical fast approach	TM	1.400
Blade tension reading cylinder with pressure gauge	MT	600
Roller support assembly (max +40° - No measuring rod)	SR D	250
Cycle start with pedal	ACP	350
Console control panel - 2,5 m long cable (only for Sirius+VHZ)	QEL SMART	1.900
Additional surface for 0° cutting	PAT 0°	200
Manual cutting mode	KIT M	300
M42 bimetallic bandsaw blade	2700x27x0,9	35

EASY ROLLER TABLE 400 mm wide roller - Load 260 kg/m (h min 940 mm / h max 1030 mm)

2-leg roller table 1 m (1st Module)	RE2G	750
1-leg roller table 1 m (Next module)	RE1G	650

FRAME 550 mm wide roller - Load 750 kg (h min 840 mm / h max 1015 mm)

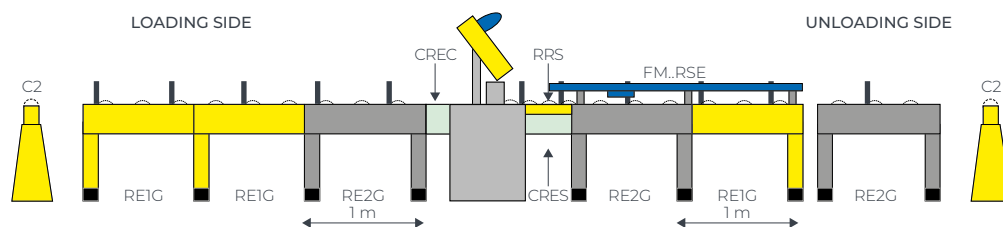
C2	630
----	-----

EASY ROLLER TABLE MACHINE CONNECTION

Loading side connection	CREC	250
Unloading side connection	CRES	350
Unloading side pull-out roller surface - Needs CRES	RRS	350

LENGTH STOPS WITH ARTICULATED STRIKER FOR EASY ROLLER TABLE

Length stop 1 m	FM1RSE	700
Length stop 2 m	FM2RSE	850
Length stop 3 m	FM3RSE	1.000
Length stop 4 m	FM4RSE	1.100
Length stop 5 m	FM5RSE	1.300
Length stop 6 m	FM6RSE	1.500



0°

45°→

60°→


●	a	a	a
	b	b	b
Ø mm	axb mm	axb mm	axb mm
240	240	210x280	240x260

●	a	a	a
	b	b	b
Ø mm	axb mm	axb mm	axb mm
185	175	140x180	220x165


●	a	a	a
	b	b	b
Ø mm	axb mm	axb mm	axb mm
115	110	110x110	110x110

2700x27x0,9
mm35÷70
m/min

SIRIUS

1,3
kW16÷120
m/min

SIRIUS+VHZ

1,5
kW0,08
kW0,36
kW410
kg0,9x1,45x1,6
m axbxc950±10
mmmax 100x250
mm axb
min 140 mm - b

OPTIONAL